Nightingale

User Handbook




CXO

6200 Series


Thank you for choosing Nightingale.

Proudly designed and manufactured in Canada since 1928, every Nightingale chair reflects nearly a century of craftsmanship, thoughtful innovation, and dependable performance. We hope it supports your work comfortably and reliably for years to come.

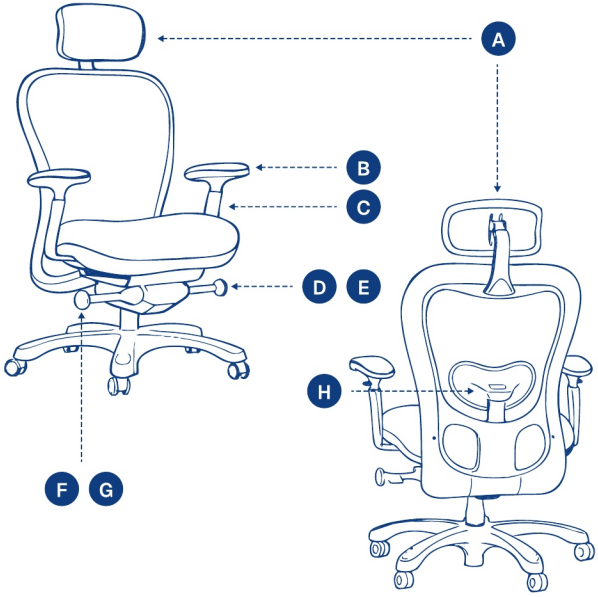




6200 6200TI 6200DTI 6200HD 6200DHD L6200 L6200D



A **Height and Angle Adjustable Headest**

Raise or lower the headrest to the desired height; it locks automatically. Tilt to adjust the angle.



B **Arm Pad Slide & Pivot**

Press and hold the front button to pivot, or the back button to slide. Adjust to the desired position and release to lock.



C **Arm Height & Width Adjustment**

Lift the trigger to adjust the arm height. Pull out or push in to adjust the width.



D **Seat Slider**

Lift the lever to unlock. While seated, move the seat to the desired position, then release the lever to lock.



E **Multi-Position Tilt Lock**

Turn the knob clockwise to lock. Turn it counter-clockwise and lean back to unlock and release the backrest.



F **Seat Height Adjustment**

To lower, lift the lever up while seated. To raise the seat, lift the same lever with no weight on the seat.




G **Tension Adjustment**

Turn the right-hand knob clockwise to increase tension. Turn the same knob counterclockwise to decrease tension.



H **Lumbar Adjustment**

Push in to increase lumbar depth. To release, hold the reset button and gently pull outward. Lift to adjust the height; raise it fully to reset.



Optional 2D Adjustable Arm

Press and hold the button to adjust the armrest height. Release the button to lock it in place. (6200DHD, 6200HD, 6200DTI, and 6200TI only)

Care Instructions

With regular care and maintenance, your CXO™ will provide many years of superior performance and satisfaction. To maintain the quality of your Nightingale product, please follow the cleaning instructions outlined here.

Mechanism
Once a year, lubricate the mechanism using light sewing-machine oil or a similar product. Use the plastic straw attached to the sprayer. To prevent dripping and possible damage to surrounding surfaces, avoid over-lubrication.

ABLEX™ Mesh
Clean with mild detergent and water applied with a clean damp cloth or sponge. Wipe with a clean cloth dampened with water and allow it to air-dry. Never use hot water and avoid scrubbing. Use gentle movements.

Plastic Parts
To clean, spray with a mild detergent and wipe it clean with a cloth dampened with water. Do not use abrasives or excessive amounts of cleaner.

Frame
Powder-coated frames can be cleaned by wiping with a damp cloth and any mild detergent.

Warranty and Care
For complete warranty coverage, terms, exclusions, and product care information, please visit www.nightingalechairs.com



www.nightingalechairs.com
2301 Dixie Road, Mississauga, ON, Canada L4Y 1Z9